

AQUA FLO

Aqua Flo 475 Series Reverse Osmosis Systems

Fast, Simple & Sanitary Maintenance!

Quick connect disposable cartridges and membrane make for easy 'Do-It-Yourself' maintenance. With built in auto water shut-offs there is no need to turn off the water supply prior to maintenance.

Because traditional systems require the disinfection of the permanent housing canisters and involve more direct human contact, maintenance can take as much as an hour and if not done properly can result in a contaminated system.

Disposable cartridges change in seconds and reduce contamination risk!




"Change filters in seconds without turning off water! No tools required!"

All models feature:

- ◆ Four stage filtration: 5 micron sediment pre-filter, 10 micron coconut carbon pre & post filters, quick connect 75 GPD NSF Certified TFC membrane
- ◆ Bayonet-style 1/4 turn quick connect disposable cartridges with auto water shut-off
- ◆ Includes faucet and 3.0 gallon NSF Certified storage tank.(Designer faucets available)
- ◆ 3/8" tubing for high product flow rate from tank to faucet
- ◆ Quick connect fittings, inlet saddle and drain saddle, labelled tubing for easy installation
- ◆ Two year warranty (excluding consumable filter cartridges and RO membrane)

| Model Description | Stages | Sediment Filter | Pre-Filter | Membrane | Post-Filter | Rating GPD | Dimensions H x W x D (in) |
|---------------------|--------|-----------------|--------------------------|----------|--------------------------|------------|---------------------------|
| Aqua Flo 475 PRO | 4 | 5 Micron | 10 Micron Coconut Carbon | TFC | 10 Micron Coconut Carbon | 75 | 14.5 x 13 x 4.5 |
| Aqua Flo 475 PRO BP | 4 | 5 Micron | 10 Micron Coconut Carbon | TFC | 10 Micron Coconut Carbon | 75 | 16.5 x 14.5 x 6.25 |

| Replacement Filters / Options |
|--|
| SED-10 (Sediment Filter - 5 Micron) |
| COC-10 Coconut Carbon (Pre & Post 10 Micron) |
| CB-10 Carbon Block (Optional Filter - 10 Micron) |
| GAC-10 Granular Carbon (Optional Filter) |
| RO Membrane 75 GPD TFC |

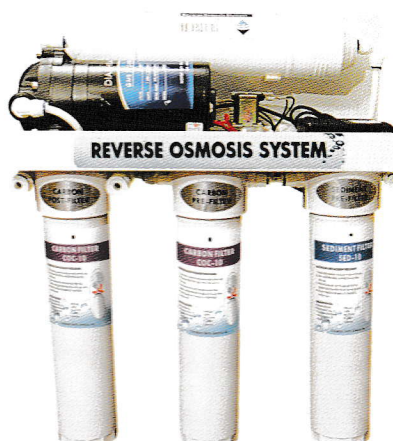

| Feed Water Guidelines | |
|--|-----------|
| Maximum TDS | 2000 ppm |
| Hardness | <7gpg |
| Iron (Fe) | <0.2ppm |
| Manganese (Mn) | <0.05ppm |
| Hydrogen Sulfide | 0.0ppm |
| Turbidity | <1.0NTU |
| Feed Water Pressure | 40-100psi |
| Temperature | 40-100°F |
| pH Range | 3.0-11.0 |
| Note: Pretreatment suggested if conditions exceed parameters. Must be installed on potable water. | |

Booster Pump Model also includes:

- ◆ Pump mounted on RO to maintain constant water pressure
- ◆ Raises water pressure to ideal level for maximum efficiency
- ◆ Use on rural supplies with low pressure or high TDS
- ◆ Exclusive Auto Flush feature extends membrane life
- ◆ Self-priming and whisper quiet
- ◆ 24VAC transformer (included) from a standard 120VAC electrical outlet
- ◆ Flexible mounting plate, quick connect fittings and pressure shut-off switch

AQUA FLO

A Division of



Your Local Water Specialist

Advanced Water Treatment Systems
124 River Forest Road
Evansdale, Iowa 50707
319-236-8000
mschipper@advwater-systems.com